


TAG: _____

SPECIFICATION

**Upflow/Horizontal
Direct or Non-Direct
Vent Gas Furnace**

AUH1B060A9361A

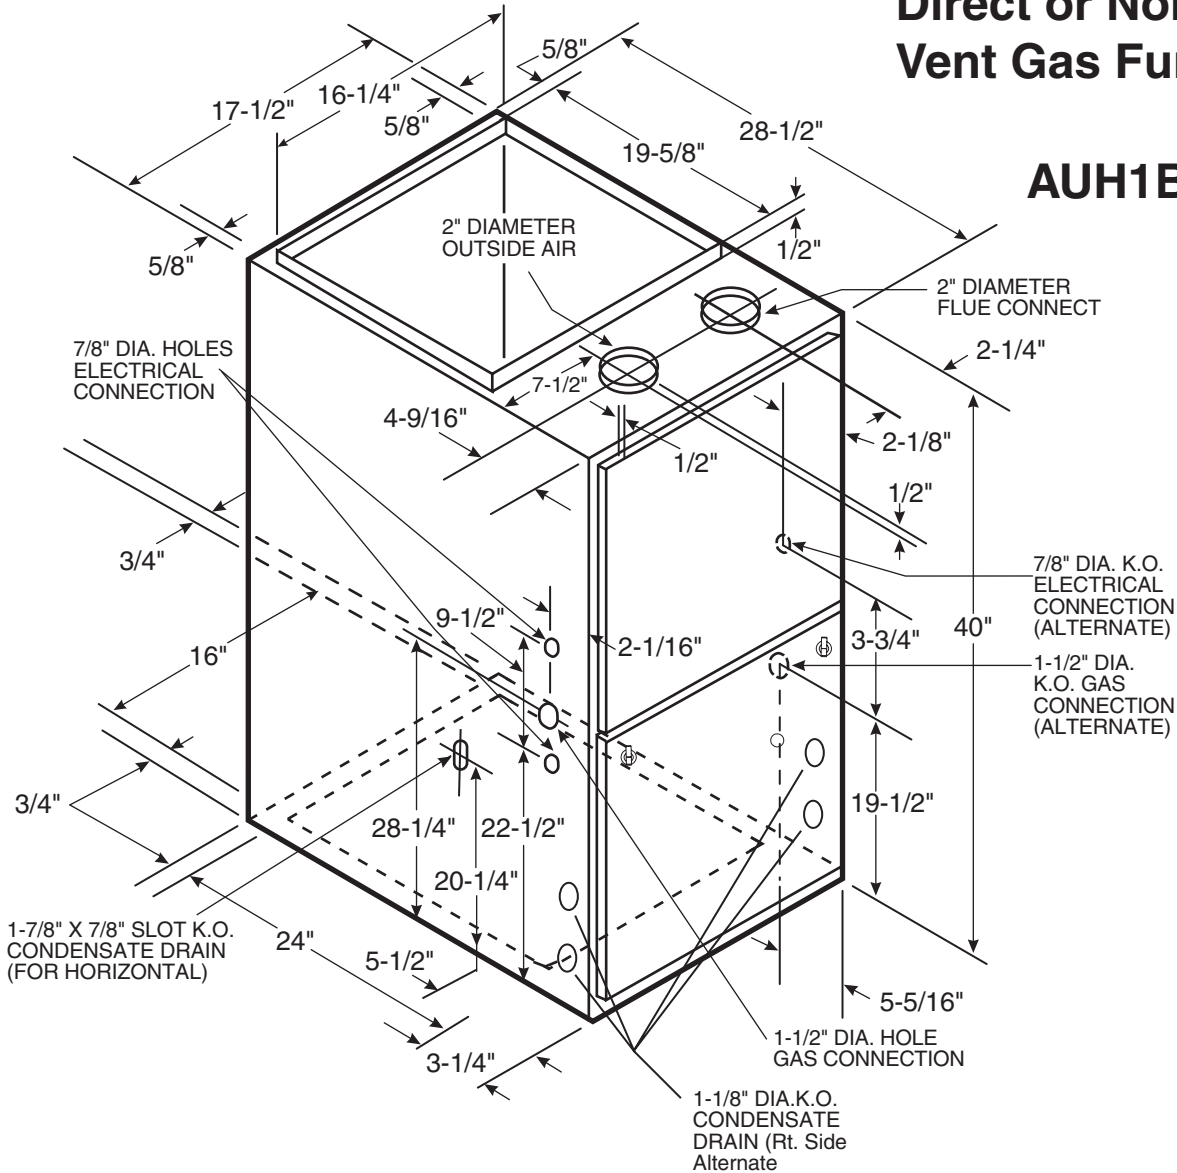

| FURNACE AIRFLOW (CFM) VS. EXTERNAL STATIC PRESSURE (in. w.c.) | | | | | | | | | | |
|---|-----------------------|------|------|------|------|------|------|------|------|------|
| MODEL | SPEED TAP | 0.10 | 0.20 | 0.30 | 0.40 | 0.50 | 0.60 | 0.70 | 0.80 | 0.90 |
| *UH1B060A9361A | 4 - HIGH - Black | 1359 | 1313 | 1264 | 1204 | 1144 | 1079 | 1004 | 919 | 812 |
| | 3 - MED.-HIGH - Blue | 1232 | 1199 | 1161 | 1116 | 1065 | 1004 | 934 | 852 | 744 |
| | 2 - MED.-LOW - Yellow | 1077 | 1054 | 1027 | 994 | 953 | 904 | 845 | 768 | 666 |
| | 1 - LOW - Red | 926 | 913 | 895 | 871 | 836 | 792 | 733 | 670 | 570 |

*= First letter may be "A" or "T"

| CFM VS. TEMPERATURE RISE | | | | | | | | | | | |
|--------------------------|-----------------------------|-----|-----|------|------|------|------|------|------|------|--|
| MODEL | Cubic Feet Per Minute (CFM) | | | | | | | | | | |
| | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1300 | 1400 | 1500 | 1600 | |
| *UH1B060A9361A | | | 59 | 53 | 48 | 44 | 41 | 38 | | | |

*= First letter may be "A" or "T"

General Data ①

| | |
|------------------------------|---------------------|
| TYPE | Upflow/Horizontal |
| RATINGS ② | |
| Input BTUH | 60,000 |
| Capacity BTUH (ICS) ③ | 57,000 |
| AFUE | 95.0 |
| Temp. rise (Min.-Max.) °F. | 30 - 60 |
| BLOWER DRIVE | DIRECT |
| Diameter-Width (In.) | 10 x 7 |
| No. Used | 1 |
| Speeds (No.) | 4 |
| CFM vs. in. w.g. | See Fan Performance |
| Motor HP | 1/3 |
| R.P.M. | 1075 |
| Volts/Ph/Hz | 115/1/60 |
| COMBUSTION FAN - Type | Centrifugal |
| Drive - No. Speeds | Direct - 1 |
| Motor HP - RPM | 1/55- 3450 |
| Volts/Ph/Hz | 115/1/60 |
| F.L. Amps | 1.75 |
| FILTER — Furnished? | No |
| Type Recommended | High Velocity |
| Hi Vel. (No.-Size-Thk.) | 1 - 17x25 - 1in. |

| | |
|---|---------------------------|
| VENT PIPE DIAMETER — Min. (in.) ⑤⑥ | 2 Round |
| HEAT EXCHANGER | |
| Type-Fired | Alum. Steel |
| -Unfired | |
| Gauge (Fired) | 20 |
| ORIFICES — Main | |
| Nat. Gas Qty. — Drill Size | 3 — 45 |
| L.P. Gas Qty. — Drill Size | 3 — 56 |
| GAS VALVE | Redundant - Single Stage |
| PILOT SAFETY DEVICE | |
| Type | Hot Surface Ignition |
| BURNERS — Type | Multiport Inshot |
| Number | 3 |
| POWER CONN. — V/Ph/Hz ④ | 115/1/60 |
| Ampacity (In Amps) | 9.2 |
| Max. Overcurrent Protection (amps) | 15 |
| PIPE CONN. SIZE (IN.) | 1/2 |
| DIMENSIONS | H x W x D |
| Crated (In.) | 41- 3/4 x 19-1/2 x 30-1/2 |
| Uncrated (In.) | 40 x 17-1/2 x 28 |
| WEIGHT | |
| Shipping (Lbs.)/Net (Lbs) | 150 / 140 |

Notes

- ① Central Furnace heating designs are certified by to ANSI Z21.47 / CSA 2.3.
- ② For U.S. applications, above input ratings (BTUH) are up to 2,000 feet, derate 4% per 1,000 feet for elevations above 2,000 feet above sea level. For Canadian applications, above input ratings (BTUH) are up to 4,500 feet, derate 4% per 1,000 feet for elevations above 4,500 feet above sea level.
- ③ Based on U.S. government standard tests.
- ④ The above wiring specifications are in accordance with National Electrical Code; however, installations must comply with local codes.
- ⑤ Refer to the Vent Length Table in the Installer's Guide or the Allowable Vent Length label located on the furnace.
- ⑥ All *UH1 furnace models have a vent outlet diameter that equals 2".

Mechanical Specifications

NATURAL GAS MODELS — Central heating furnace designs are certified by the American Gas Association for both natural and L.P. gas. Limit setting and rating data were established and approved under standard rating conditions using American National Standards Institute standards.

SAFE OPERATION — The Integrated System Control has solid state devices, which continuously monitor for presence of flame, when the system is in the heating mode of operation. Slow opening, dual solenoid combination gas valve and regulator provide extra safety and quieter operation.

QUICK HEATING — Durable, cycle tested, heavy gauge **aluminized steel heat exchanger and stainless steel secondary heat exchanger** quickly transfer over 90% of the heat to provide warm conditioned air to the structure. **Low energy power vent blower**, to increase efficiency and provide a positive discharge of gas fumes to the outside as it draws outdoor air in for sealed combustion, which means it uses no indoor air for combustion.

Since American Standard Heating & Air Conditioning has a policy of continuous product and product data improvement, it reserves the right to change specifications and design without notice.

Technical Literature - Printed in U.S.A.

American Standard
Heating & Air Conditioning
6200 Troup Highway
Tyler, TX 75707

BURNERS — Multi-port, in-shot burners will give years of quiet and efficient service. All models can be converted to **L.P. gas** without changing burners.

INTEGRATED SYSTEM CONTROL — Exclusively designed operational program provides total control of furnace limit sensors, blowers, gas valve, flame control and includes self diagnostics for ease of service. The built-in, selectable "**Cooling Fan Off**" feature provides time-delay capability like a BAY24X045 Time-Delay Kit for cooling operation. Also contains connection points for E.A.C./humidifier.

AIR DELIVERY — The multispeed, direct-drive blower motor, with sufficient airflow range for most heating and cooling requirements, will switch from heating to cooling speeds on demand from room thermostat. The blower door safety switch will prevent or terminate furnace operation when the blower door is removed. (Fan relay and 35VA control transformer is standard).

STYLING — Heavy gauge steel and "**wraparound**" cabinet construction is used in the cabinet with baked-on enamel finish for strength and beauty. The heat exchanger section of the cabinet is completely lined with foil-faced fiberglass insulation. This results in quiet and efficient operation due to the excellent acoustical and insulating qualities of fiberglass.

FEATURES AND GENERAL OPERATION — These High Efficiency, Direct Vent, Condensing Gas Furnaces employ a Hot Surface Ignition system, which eliminates the waste of a constantly burning pilot. They are convertible for HORIZONTAL use by rotating the unit to its left side. The integrated system control lights the main burners upon a demand for heat from the room thermostat. Complete front service access.

- a. Low energy power venter.
- b. Vent proving differential switch.

| | |
|-----------------|-------------------|
| Library | Unitary |
| Product Section | Furnaces |
| Product | Furnace |
| Model | AUH1 |
| Literature Type | Submittal |
| Sequence | - |
| Date | 12/11 |
| File No. | AUH1B060A-SPEC-1B |
| Supersedes | AUH1B060A-SPEC-1A |

